




WC108W

Shielded composite 2 + 6 Cable - 100m rolls

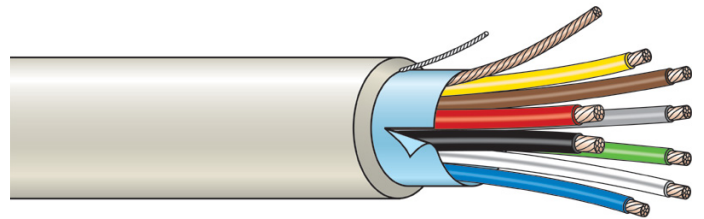

Standard Features

- For internal or external wiring of warning network systems
- Manufactured in accordance with BS4737 section 3.30
- Suitable for gluing to surfaces
- High quality PVC

WC108W

Shielded composite 2 + 6 Cable - 100m rolls

Specifications

Core	
Material	Plain copper
Thickness	0.22 mm ² (data) - 0.75 mm ² (power)
Colour	Red, black (power)
	Blue, white, yellow,
	Green, grey, brown (data)
Jacket	
Thickness	Min. 0.45 mm ² - max 0.7 mm ²
Colour	White
Electrical characteristics	
Max. conductor DC resistance	92.4 ohm/km at +20°C
Current rating	1 A
Mutual capacitance	90 pF/m

Ordering Information

Part No.	Description
WC108W	Shielded composite 2 + 6 Cable - 100m rolls

